

SMD Circulator 表贴式环形器

H101P Series

1.Features 产品特点

UMTS, LTE Band


PCB Soldering Re-flow

Wide Operation Temperature Range -45 ~ 125°C

Compact Package Design for PCB Applications

2.Dimensions 尺寸展示

Unit:mm

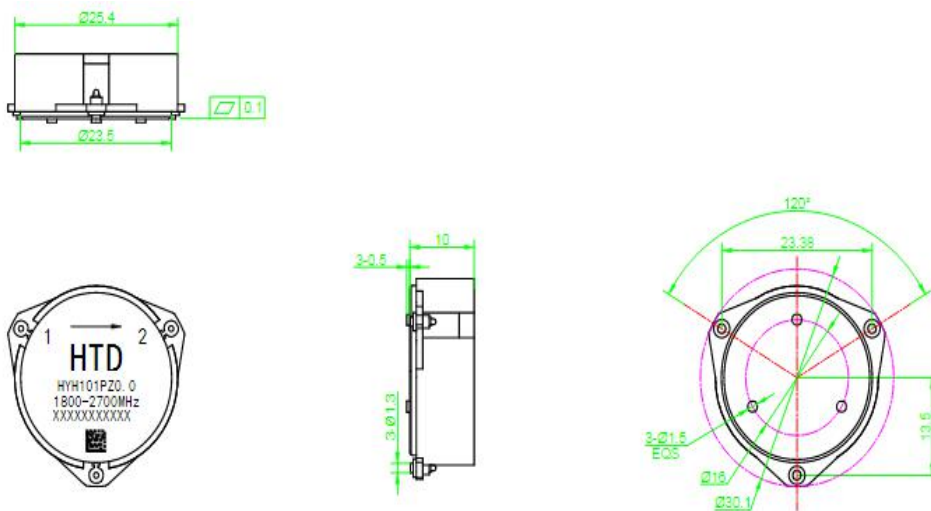

3.Specifications 规格参数

Part No.	Frequency (GHz)		Center Frequency	Bandwidth	Isolation	INS LOSS	VSWR	Power	IMD (@2X43dBm)
	F1	F2	(GHz)	(GHz)	(dB) MIN	(dB) MAX	(dB) MAX	(W)	(-dBc) MAX
HYH101PF0.0(700-800)MHz	0.700	0.800	0.7500	0.100	22	0.3	1.17	200	-65
HYH101PF0.0(1800-2700)MHz	1.800	2.700	2.2500	0.900	18	0.4	1.29	200	-60